





SPLITScreens, LLC

dba KALCOM

NEW PRODUCT ANNOUNCEMENT


SUPERQUAD 16

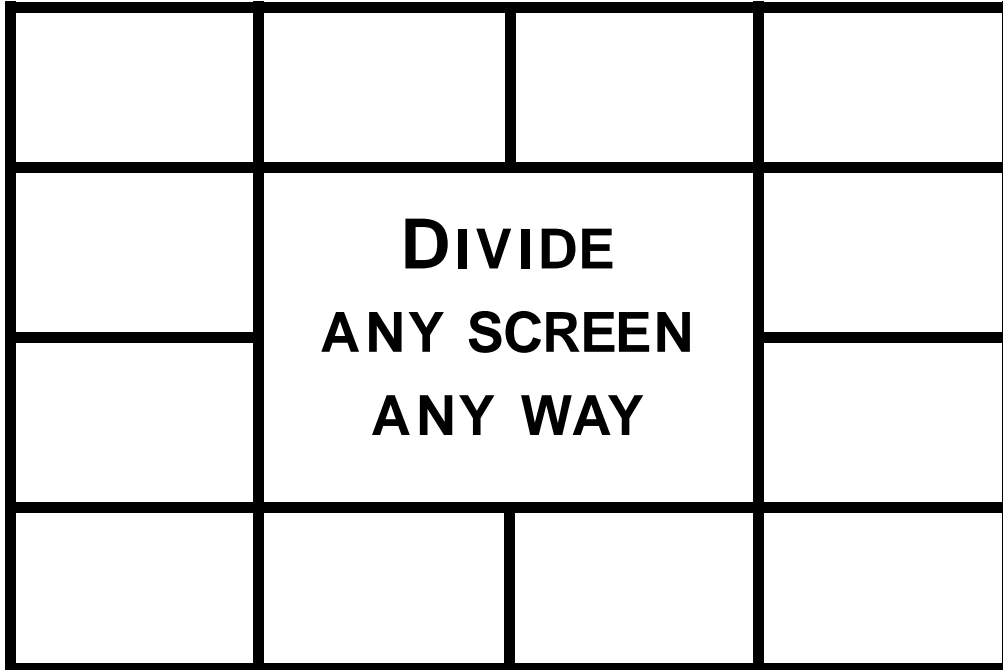

9




4

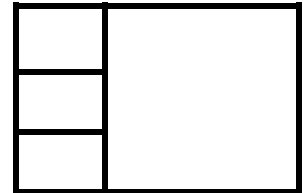


5+1


12+1

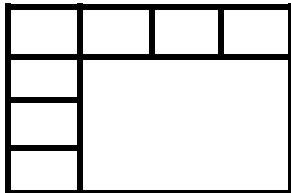


7+1

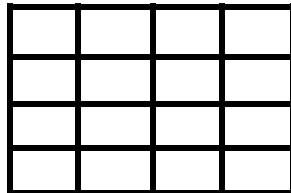

16

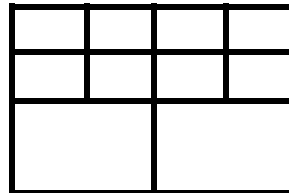

8+2

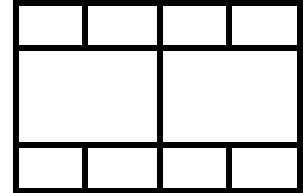


10

**MULTI-SIGNAL,
REAL TIME
SIMULTANEOUS
DISPLAY FOR
MANY
APPLICATIONS**

- Video Conferencing
- Studio Monitoring
- Video Arraignment
- Industrial or Military Surveillance
- Distance Learning
- Preview Guide Channel
- Remote Diagnostics

SUPERQUAD 16

FRONT

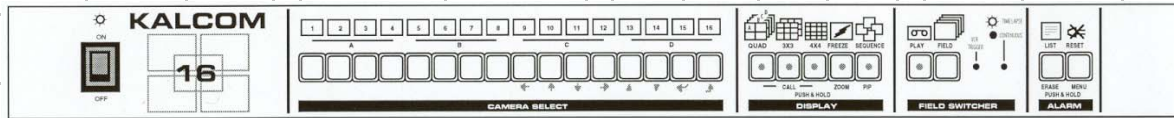

SPECIFICATIONS

Video Input

16 Channel BNC 1vpp at 75 ohm Load On

Sequential Switching Time

Individual 0-30 Sec.

Resolution

NTSC - 720X480

PAL - 720X580

Signal Title Character

8 Alphanumeric

Refresh Rate

30 frame/sec

Power Input

DC 12v, AC85 ~ 265V 50/60Hz

Monitor Output

BNC 1vpp at 75 ohm Load On

Power Consumption

Less than 1.5 W

Recording Output

BNC 1Vpp at 75 ohm Load On,
S-VHS Y:1vpp E:0.285vpp

Operating Temperature

-10°C ~ +60°C/20 ~ 85%RH

Remote Input

Parallel - TTL Level or O.C Drive,

Serial - RS-232C


Size (WxHxD)

430X44X285mm, 16.9"X1.73"X11.2"

Weight

3kg / 6lbs.

BACK

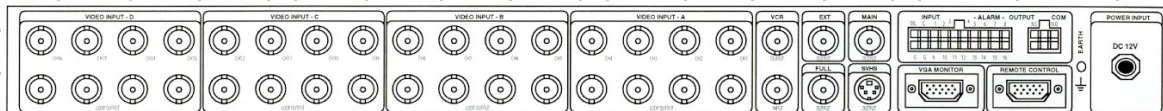

SPLITScreens, LLC

Tel. 908-439-3218 • Fax 908-439-9517

Email: splitscreens.kalcom@patmedia.net